

VDA Grip Caps GPN 243



www.poeppelmann.com/en/gpn243



NEW



Application

The VDA grip cap GPN 243 is suitable for protecting the connection area of VDA quick-connect spigots and is suitable for versions with and without anti-twist protection. The particularly grippy lug with protected lug design enables very quick assembly and disassembly. The clamping by means of clamping bars enables pressure equalisation and the VDA quick-release connectors are protected up to the chamfer. The plastic used is made from post-consumer recycled material.

All information about 100% PCR can be found in "Sustainability at Pöppelmann" (see chapter 2) or at www.poeppelmann.com/en/kapsto/Responsibility.html

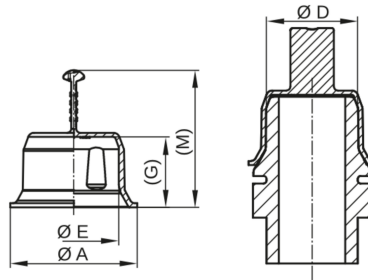

PCR-PE
blue

Article	VDA connector NW	D	A	B	E	G	M	100% PCR
GPN 243 NW 6	6	10,7	18,2	12,6	9,8	13,9	29,9	24300060000
GPN 243 NW 8	8	12,7	20,2	14,6	11,8	14,9	30,9	24300080000
GPN 243 NW 12	12	16,4	23,5	18,6	15,7	14,9	30,9	24300120000
GPN 243 NSC 12	12	16,6	23,5	18,8	15,9	14,9	30,9	24301120000
GPN 243 NW 14	14	17,9	24	19,7	17,1	12,9	28,9	24300140000
GPN 243 NSC 14	14	19,5	25,6	21,6	18,6	13,9	29,9	24301140000
GPN 243 NW 16	16	22,4	30,6	24,6	21,5	16,9	32,9	24300160000
GPN 243 NSC 16	16	21	29,1	23	20,2	17,2	33,2	24301160000
GPN 243 NW 18	18	24,8	33,2	26,6	23,9	17,4	33,4	24300180000
GPN 243 NW 20	20	26,6	35,2	28,6	25,7	17,4	33,4	24300200000
GPN 243 NSC 22	22	28,4	37,4	30,8	28	18,5	34,4	24301220000
GPN 243 NW 26	26	32,8	41,4	34,8	31,8	18,4	34,4	24300260000
GPN 243 NW 32	32	38,8	47,4	40,8	37,5	18,4	34,4	24300320000
GPN 243 NW 35	35	42	49,6	44	40,7	18,5	39,5	24300350000
GPN 243 NW 45	45	52	60,4	54	50,7	21,4	42,4	24300350000
GPN 243 NW 40	40	46,2	54,8	48,2	45,2	22,5	43,5	24300400000

Dimensions in mm.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'.

The article consists of 98 % PCR-PE and 2 % colour based on a PIR carrier. The plastic used consists of 100 % PCR.

For these articles, colour deviations and black dots cannot be completely avoided in production and are permissible. We recommend carrying out functional tests before series production.

Your added values:



More resource-saving.



Better fit.



Saves time.



Better.



Cleaner.

The plastic used consists of 100 % recycled material.

For protecting the mating surfaces of VDA quick-connect nozzles.

Newly designed removal tab for fast handling. Protected tab design.

Suitable for variants with and without anti-turn device. Clamping bars enable pressure equalisation.

Production in accordance with VDA Band 19 and ISO 16232 in our cleanroom on request.