

QC-Plugs GPN 245 Type A




www.poeppelmann.com/en/gpn245a

Application



The QC plugs GPN 245 Type A are suitable for the protection of SAE quick connector couplings, based on SAE J2044. They clamp gently and securely onto the internal sealing rings of the connector. The QC plugs are suitable for pressure tests within certain limits.

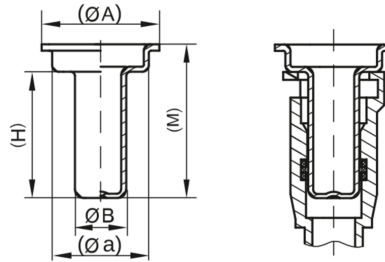

PE-HD
natural

| Article | SAE coupling NW mm | SAE coupling NW inch | A | a | B | H | M | Virgin material |
|------------------|--------------------|----------------------|----|----|------|----|------|-----------------|
| GPN 245 QC 8 | 8 | 5/16 | 26 | 22 | 7,6 | 27 | 33 | 24500080000 |
| GPN 245 QC 10 | 10 | 7/16 | 23 | 18 | 9,6 | 30 | 34 | 24500100000 |
| GPN 245 QC 12,7 | 12,7 | 1/2 | 28 | 23 | 12,2 | 30 | 36,5 | 24501270000 |
| GPN 245 QC 14,24 | 14,24 | - | 32 | 28 | 13,4 | 28 | 34,5 | 24514240000 |
| GPN 245 QC 15,9 | 15,9 | 5/8 | 34 | 30 | 15,7 | 35 | 43 | 24501590000 |

Dimensions in mm.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'.

Your added values:



Better fit.

Suitable for SAE quick connectors in accordance with SAE J2044



Seals better.

Suitable for pressure testing depending on the application.



Cleaner.

Production in accordance with VDA Band 19 and ISO 16232 in our cleanroom on request.



Better.

Clamping is carried out gently and safely on the internal sealing rings of the connector.