

VDA Sealing Plugs with tab

GPN 248



www.poeppelmann.com/en/gpn248

NEW



Application

The VDA sealing plugs with tab GPN 248 are suitable for protecting the connection area of VDA quick-release couplings. They are clamped gently and securely onto the internal sealing rings of the connector. The innovative grip tab with protected tab design enables very quick assembly and disassembly. The plastic used is made from post-consumer recycled material.

All information about 100% PCR can be found in "Sustainability at Pöppelmann" (see chapter 2) or at www.poeppelmann.com/en/kapsto/Responsibility.html



www.blauer-engel.de/uz30a

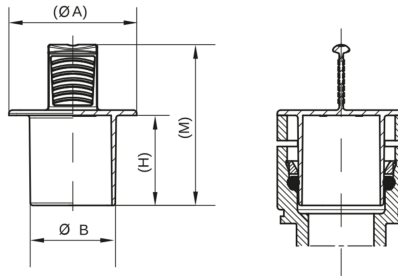

PCR-PE
blue

Article	VDA coupling NW	A	B	H	M	100% PCR
GPN 248 NW 6	6	20,4	10	20,8	42,3	24800060000
GPN 248 NW 8	8	24,4	12	22,1	43,6	24800080000
GPN 248 NW 12	12	28,4	15,8	22,2	43,8	24800120000
GPN 248 NW 14	14	27	17,2	21	42,6	24800140000
GPN 248 NW 16	16	35	21,9	26,5	48,1	24800160000
GPN 248 NW 18	18	52	37,9	28,8	50,4	24800180000
GPN 248 NW 20	20	39	26,1	26,6	48,2	24800200000
GPN 248 NW 26	26	46	31,9	28,3	49,9	24800260000
GPN 248 NW 32	32	52	37,9	28,8	50,4	24800320000
GPN 248 Form B NW 35	35	55,5	40,9	28,8	51,4	24800350000
GPN 248 NW 40	40	60,5	45,9	32,3	53,9	24800400000
GPN 248 NW 45	45	66,5	50,9	30,8	52,4	24800450000
GPN 248 NW 50	50	71	55,9	32,1	53,7	24800500000

Dimensions in mm.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'.

For these articles, colour deviations and black dots cannot be completely avoided in production and are permissible. We recommend carrying out functional tests before series production.

The article consists of 98 % PCR-PE and 2 % colour based on a PIR carrier. The plastic used consists of 100 % PCR.

Your added values:



More resource-saving.

The plastic used consists of 100 % recycled material.



Better fit.

For protecting the mating surfaces of VDA quick connectors.



Saves time.

Newly designed removal tab for fast handling. Protected tab design.



Better.

Clamping is carried out gently and safely on the internal sealing rings of the connector.