



Finned Plugs GPN 320



www.poeppelmann.com/en/gpn320

Application

The GPN 320 finned plugs offer round pipe ends in accordance with DIN EN 10220, DIN EN 10255 and DIN EN ISO 1127 protection against damage and dirt. The robust design is suitable for high load-bearing capacity. The ribbed plugs ensure a firm fit in the application even with dimension tolerances in the pipe and have a high-quality appearance thanks to their grained top surface and chamfered edges.

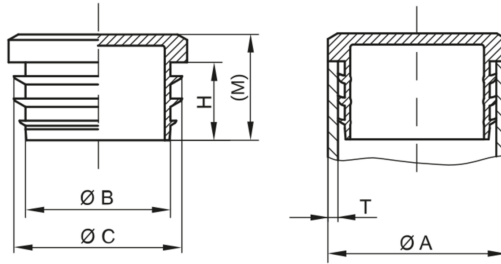

PE-LLD
black

Article	A	T min	T max	B	C	H	M	Virgin material
GPN 320 GL 10 1-2	10	1	2	5	8,5	11	15	32000100000
GPN 320 GL 12 1-2	12	1	2	7	10,5	11	15	32000120000
GPN 320 GL 13 1-2	13	1	2	8	11,5	11	15	32000130000
GPN 320 GL 14 1-2	14	1	2	9	12,5	11	15	32000140000
GPN 320 GL 15 1-2	15	1	2	10	13,5	11	15	32000150000
GPN 320 GL 16 1-2	16	1	2	11	14,5	11	15	32000160000
GPN 320 GL 18 1-2	18	1	2	13	16,5	11	15	32000180000
GPN 320 GL 20 1-2	20	1	2	15	18,5	11	15	32000200000
GPN 320 GL 22 1-2	22	1	2	16	20,5	14	19	32000220000
GPN 320 GL 25 1-2	25	1	2	19	23,5	14	19	32000250000
GPN 320 GL 27 1-2	27	1	2	21	25,5	14	19	32000270000
GPN 320 GL 28 1-2	28	1	2	22	26,5	14	19	32000280000
GPN 320 GL 30 1-2	30	1	2	24	28,5	14	19	32000300000
GPN 320 GL 32 1-2	32	1	2	26	30,5	14	19	32000320000
GPN 320 GL 34 1-2	34	1	2	28	32,5	14	19	32000340000
GPN 320 GL 35 1-2	35	1	2	29	33,5	14	19	32000350000
GPN 320 GL 36 1-2	36	1	2	30	34,5	14	19	32000360000
GPN 320 GL 38 1-2	38	1	2	32	36,5	14	19	32000380000
GPN 320 GL 40 1-2	40	1	2	34	38,5	14	19	32000400000
GPN 320 GL 42 1-2	42	1	2	36	40,5	14	19	32000420000
GPN 320 GL 45 1-2	45	1	2	39	43,5	14	19	32000450000
GPN 320 GL 48 1-2	48	1	2	42	46,5	14	19	32000480000
GPN 320 GL 50 1-2	50	1	2	43	48,5	17	22	32000500000
GPN 320 GL 55 1-2	55	1	2	48	53,5	17	22	32000550000
GPN 320 GL 60 1-2	60	1	2	53	58,5	17	22	32000600000
GPN 320 GL 60 2-3	60	2	3	51	56,5	17	22	32006030000
GPN 320 GL 70 2-3	70	2	3	61	66,5	17	22	32000700000
GPN 320 GL 70 3-4	70	3	4	59	64,5	17	22	32007030000
GPN 320 GL 76 2-3	76	2	3	67	72,5	17	22	32000760000
GPN 320 GL 76 3-4	76	3	4	65	70,5	17	22	32007630000
GPN 320 GL 90 2-3	90	2	3	81	86,5	17	22	32000900000
GPN 320 GL 90 3-4	90	3	4	79	84,5	17	22	32009030000
GPN 320 GL 102 2-3	102	2	3	93	98,5	17	22	32001020000
GPN 320 GL 102 3-4	102	3	4	91	96,5	17	22	32010230000

Dimensions in mm.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'.

Finned Plugs GPN 320



www.poeppelmann.com/en/gpn320

Your added values:



Better fit.

To close off round pipes in accordance with DIN EN 10220, DIN EN 10255, and DIN EN ISO 1127.



More robust.

Solid design for increased demands.



More versatile.

Ribs on the shank provide a secure fit even with varying tube tolerances.



Better.

High visual appeal due to grained top surface finish and chamfered edges.